


**POMPA DEĞERLERİ /
PUMP PROPERTIES**

Q	: 25,2 m ³ /h
Hm	: 1 ~ 5 Bar
T	: 0 ~ 70 °C
n	: 500 d/d (rpm)
Visc.	: 10 ~ 5500 cst

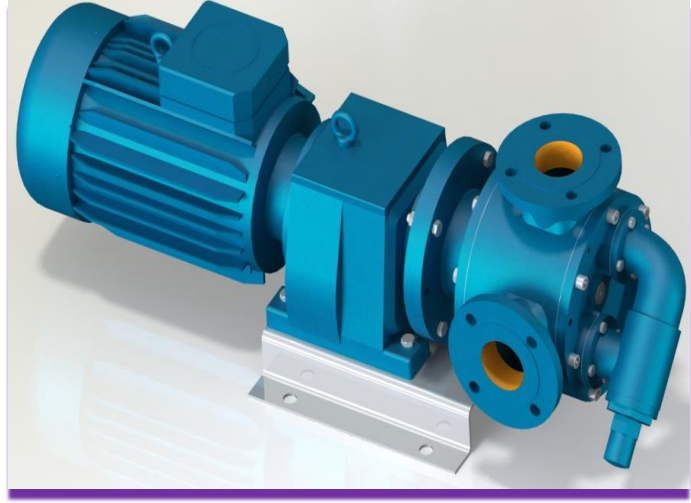

KULLANIM ALANLARI

- Fuel Oil Servis Tankları, Gaz Yağı, Mazot Tankerlerinde
- Kağıt ve Boya Sanayinde
- Küçük çapta kızgın yağ sirkülasyonlarında
- İlaç, kimya ve deterjan sanayinde
- Gıda Sanayinde

MALZEME SEÇENEKLERİ

- Pompa Gövdesi, Kapaklar : Dökme (pik) demir, Sfero döküm, Çelik döküm, Paslanmaz AISI 316- AISI 316L döküm
- Dişliler : Sfero döküm, Çelik döküm, Paslanmaz AISI 316- AISI 316L döküm
- Yataklar : Snbz 12 bronz, karbon grafit, Tungsten Karbür, rulman
- Sızdırmazlık: Keçeli Sistem

USE AREAS

- Fuel Oil Service Tanks, Gasoil, Diesel Tankers
- Paper and Paint/dye industry
- Circulation of Hot Oil (limited)
- Medicine, Chemical and Detergent Industry
- Food Industry.

MATERIAL OPTIONS

- Pump Body, covers : Pig Cast Iron, Spheroidal Cast iron, Cast Steel, AISI 316/316L CrNi Stainless Steel
- Gears : Spheroidal Cast iron, Cast Steel, AISI 316/316L CrNi Stainless Steel
- Bearings: Snbz 12 bronze, carbon graphite, Tungsten carbide, bearing
- Sealing: Lip seal


C4H POMPASINA AİT KAPASİTE VE GÜÇ TABLOSU CAPACITY AND POWER TABLE				
KAPASİTE (m³/h) CAPACITY (Q)	DEVİR (d/d) SPEED (rpm)	ÇIKIŞ BASINCI / PRESSURE		VİSKOZİTE VISCOSITY
		3 Bar	5 Bar	
6,1	125	2,2 kW	3 kW	5 500 cst
11	225	4 kW	5,5 kW	5 500 cst
16,6	325	5,5 kW	7,5 kW	5 500 cst
6,1	125	2,2 kW	2,2 kW	1 650 cst
11	225	3 kW	4 kW	1 650 cst
16,6	325	5,5 kW	7,5 kW	1 650 cst
12,75	250	3 kW	4 kW	550 cst
17,8	350	4 kW	5,5 kW	550 cst
25,5	500	5,5 kW	7,5 kW	550 cst
12,7	250	2,2 kW	4 kW	165 cst
17,8	350	3 kW	5,5 kW	165 cst
25,4	500	4 kW	7,5 kW	165 cst
12,6	250	2,2 kW	4 kW	22 cst
17,6	350	3 kW	5,5 kW	22 cst
25,2	500	4 kW	7,5 kW	22 cst

Tabloda bulunan veriler standart viskozitelere göre hazırlanmıştır. Tabloda bulunmayan viskozite değerleriniz için lütfen firma ile iletişime geçiniz.

The data in the table are prepared according to standard viscosities. Please contact the company for viscosity values not included in the table.



POMPA BOYUT ÖLÇÜLERİ / PUMP DIMENSIONS

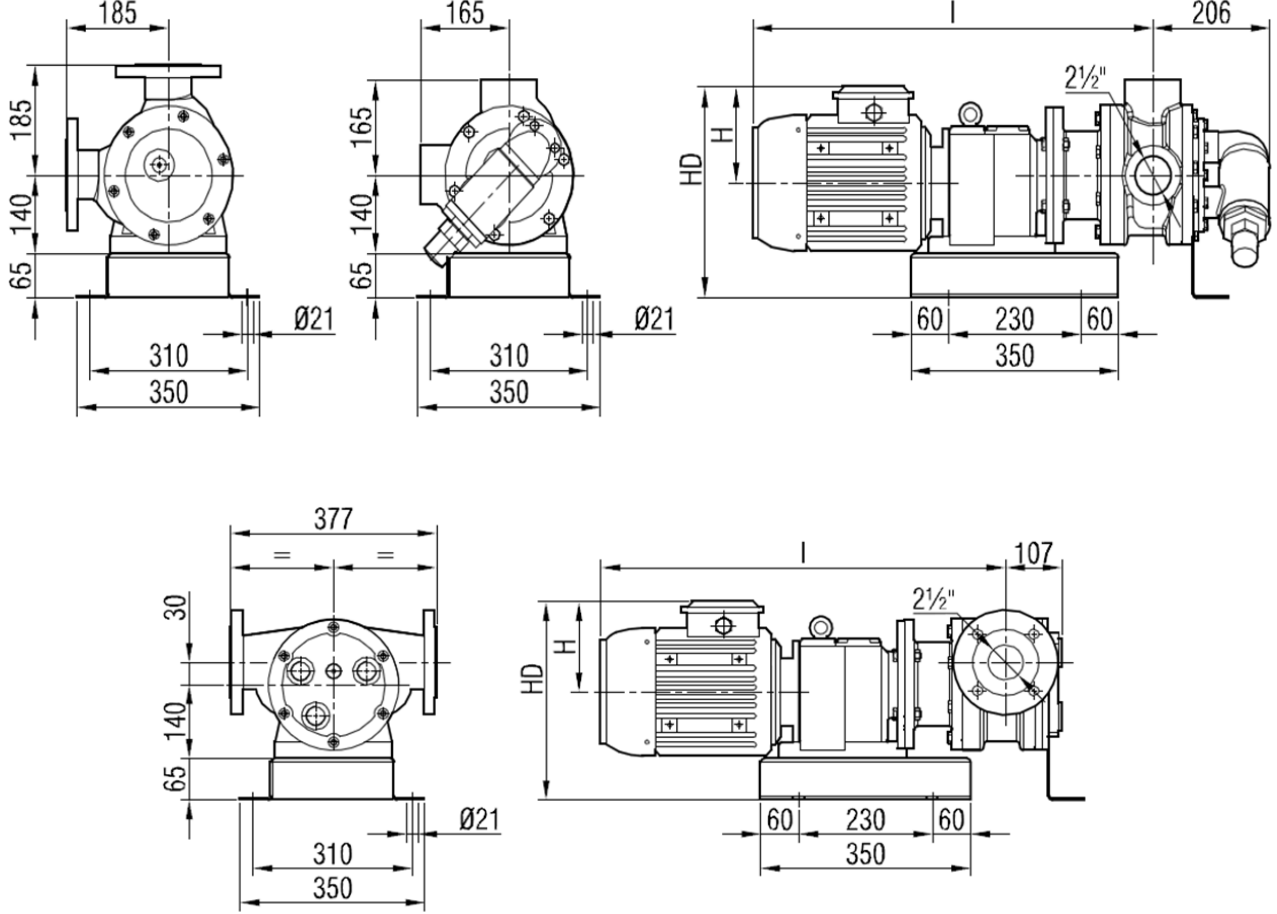

Paslanmaz ve exproof durumunda ölçülerin değişim hakkı firmamızda saklıdır. Bilgi için lütfen firma ile iletişime geçiniz.

When it is stainless and exproof, our company reserves the right to change the measurement. For more information, please contact the company.

MOTOR GÜÇ VE DEVİRLERİ MOTOR POWER AND SPEED			I	HD	H	kg.	
3-4 hp / 2,2-3 kW	65/450 d/d (rpm)	İRAFP62/100L	676	335	141	116	124
5,5 hp / 4 kW	87/450 d/d (rpm)	İRAFP62/112M	697	343	149	126	
7.5 hp / 5.5 kW	70/400 d/d (rpm)	İRAFP72/132S	775	371	182	149	
10 hp / 7.5 kW	120/400 d/d (rpm)	İRAFP72/132M	821			160	

YEDEK PARÇA LİSTESİ / SPARE PARTS LIST

- **KEÇELİ**
SEALED WITH LIP SEAL

