


**POMPA DEĞERLERİ /
PUMP PROPERTIES**

Q	: 32m ³ /h
Hm	: 1 ~ 5 Bar
T	: 0 ~ 70 °C
n	: 420 d/d (rpm)
Visc.	: 10 ~ 5500 cst

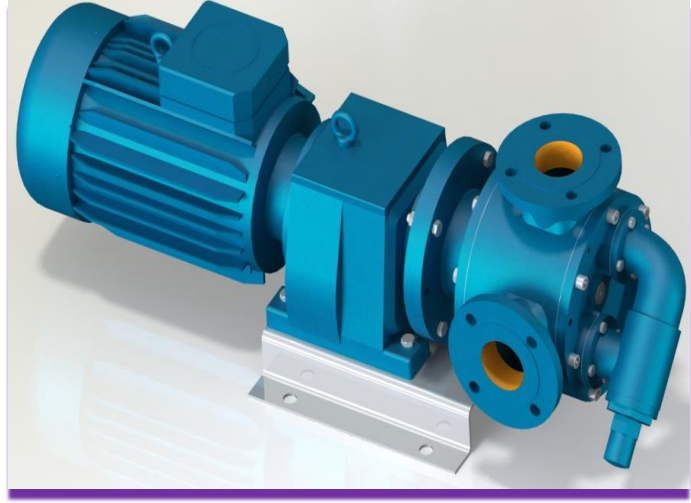

KULLANIM ALANLARI

- Fuel Oil Servis Tankları, Gaz Yağı, Mazot Tankerlerinde
- Kağıt ve Boya Sanayinde
- Küçük çapta kızgın yağ sirkülasyonlarında
- İlaç, kimya ve deterjan sanayinde
- Gıda Sanayinde

MALZEME SEÇENEKLERİ

- Pompa Gövdesi, Kapaklar : Dökme (pik) demir, Sfero döküm, Çelik döküm, Paslanmaz AISI 316- AISI 316L döküm
- Dişliler : Sfero döküm, Çelik döküm, Paslanmaz AISI 316- AISI 316L döküm
- Yataklar : Snbz 12 bronz, karbon grafit, Tungsten Karbür, rulman
- Sızdırmazlık: Keçeli Sistem

USE AREAS

- Fuel Oil Service Tanks, Gasoil, Diesel Tankers
- Paper and Paint/dye industry
- Circulation of Hot Oil (limited)
- Medicine, Chemical and Detergent Industry
- Food Industry.

MATERIAL OPTIONS

- Pump Body, covers : Pig Cast Iron, Spheroidal Cast iron, Cast Steel, AISI 316/316L CrNi Stainless Steel
- Gears : Spheroidal Cast iron, Cast Steel, AISI 316/316L CrNi Stainless Steel
- Bearings: Snbz 12 bronze, carbon graphite, Tungsten carbide, bearing
- Sealing: Lip seal


C6H POMPASINA AİT KAPASİTE VE GÜÇ TABLOSU CAPACITY AND POWER TABLE				
KAPASİTE(m³/h) CAPACITY (Q)	DEVİR (d/d) SPEED (rpm)	ÇIKIŞ BASINCI / PRESSURE		VİSKOZİTE VISCOSITY
		3 Bar	5 Bar	
7,5	100	2,2 kW	3 kW	5500 cst
11,5	150	3 kW	4 kW	5500 cst
17	220	5,5 kW	7,5 kW	5500 cst
11,3	150	2,2 kW	4 kW	1650 cst
18,9	250	4 kW	5,5 kW	1650 cst
26,5	350	5,5 kW	7,5 kW	1650 cst
11,3	150	2,2 kW	3 kW	550 cst
18,9	250	3 kW	5,5 kW	550 cst
26,5	350	5,5 kW	7,5 kW	550 cst
19	250	3 kW	5,5 kW	165 cst
26,6	350	4 kW	7,5 kW	165 cst
32	420	5,5 kW	7,5 kW	165 cst
19	250	3 kW	5,5 kW	22 cst
26,6	350	4 kW	7,5 kW	22 cst
32	420	5,5 kW	7,5 kW	22 cst

Tabloda bulunan veriler standart viskozitelere göre hazırlanmıştır. Tabloda bulunmayan viskozite değerleriniz için lütfen firma ile iletişime geçiniz.

The data in the table are prepared according to standard viscosities. Please contact the company for viscosity values not included in the table.



POMPA BOYUT ÖLÇÜLERİ / PUMP DIMENSIONS

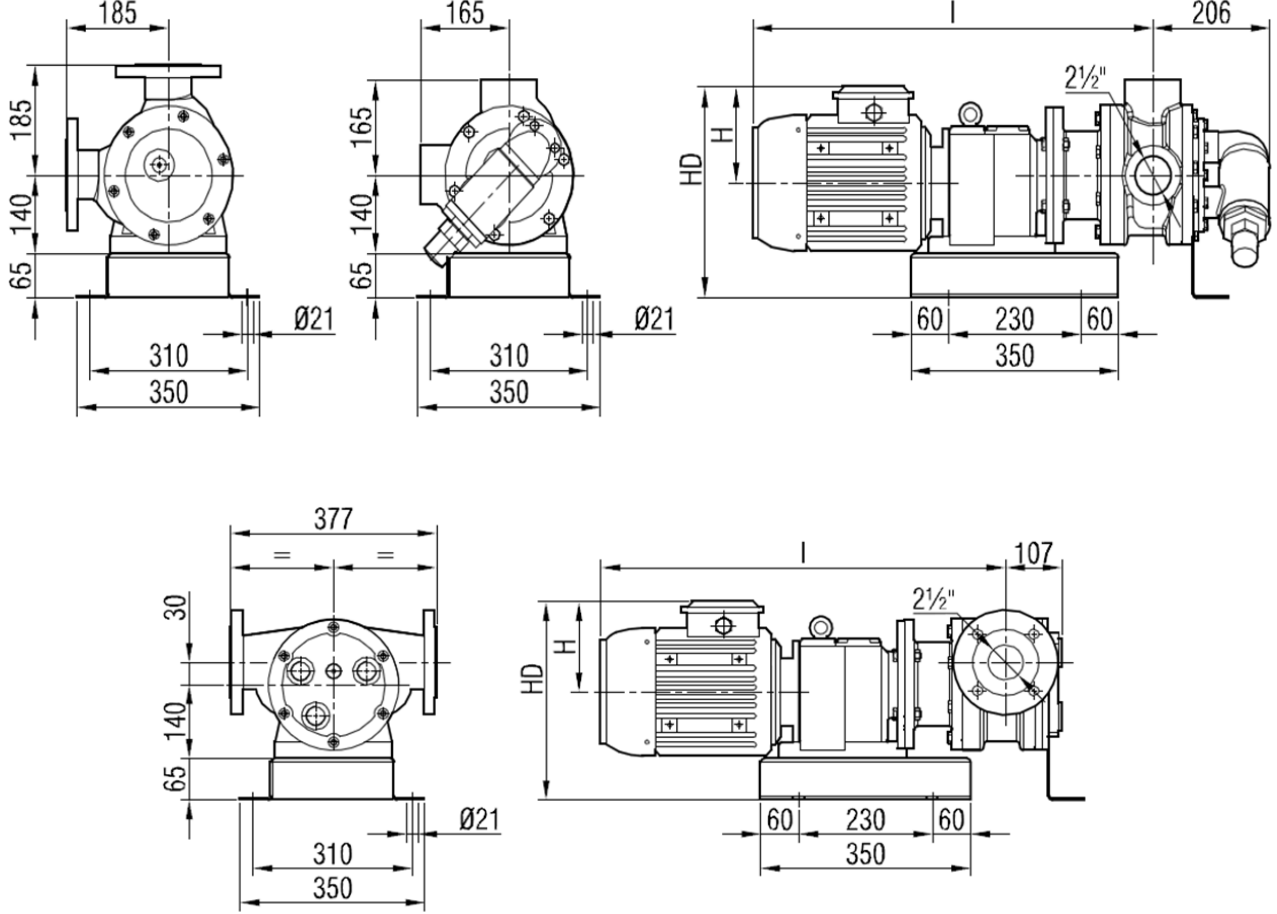

Paslanmaz ve exproof durumunda ölçülerin değişim hakkı firmamızda saklıdır. Bilgi için lütfen firma ile iletişime geçiniz.

When it is stainless and exproof, our company reserves the right to change the measurement. For more information, please contact the company.

MOTOR GÜÇ VE DEVİRLERİ MOTOR POWER AND SPEED			I	HD	H	kg.	
3-4 hp / 2,2-3 kW	65/450 d/d (rpm)	İRAFP62/100L	701	335	141	123	131
5,5 hp / 4 kW	87/450 d/d (rpm)	İRAFP62/112M	722	343	149	133	
7.5 hp / 5.5 kW	70/400 d/d (rpm)	İRAFP72/132S	800	371	182	156	
10 hp / 7.5 kW	120/400 d/d (rpm)	İRAFP72/132M	846			167	

YEDEK PARÇA LİSTESİ / SPARE PARTS LIST

- **KEÇELİ**
SEALED WITH LIP SEAL

