

**POMPA DEĞERLERİ /
PUMP PROPERTIES**

Q	: 3 m ³ /h
Hm	: 1 ~ 15 Bar
T	: 0 ~ 250 °C
n	: 1500 d/d (rpm)
Visc.	: 10 ~ 55.000 cst



KULLANIM ALANLARI

- Fuel Oil Servis Tankları, Gaz Yağı, Mazot Tankerlerinde
- Reçine ve Polimerler
- Asfalt ve Bitüm
- Kağıt ve Boya Sanayinde
- Küçük çapta kızgın yağ sirkülasyonlarında
- İlaç, kimya ve deterjan sanayinde
- Gıda Sanayinde

MALZEME SEÇENEKLERİ

- Pompa Gövdesi, Kapaklar : Dökme (pik) demir, Sfero döküm, Çelik döküm, Paslanmaz AISI 316- AISI 316L döküm
- Dişliler : Sfero döküm, Çelik döküm, Paslanmaz AISI 316- AISI 316L döküm
- Yataklar : Snbz 12 bronz, karbon grafit, Tungsten Karbür, rulman
- Sızdırmazlık: Yumuşak Salmastra, Mekanik salmastra. Özel Kapalı Sistem, Kartuş Mekanik Salmastra

USE AREAS

- Fuel Oil Service Tanks, Gasoil, Diesel Tankers
- Resin and Polymer
- Asphalt and Bitumen
- Paper and Paint/dye industry
- Circulation of Hot Oil (limited)
- Medicine, Chemical and Detergent Industry
- Food Industry.

MATERIAL OPTIONS

- Pump Body, covers : Pig Cast Iron, Spheroidal Cast iron, Cast Steel, AISI 316/316L CrNi Stainless Steel
- Gears : Spheroidal Cast iron, Cast Steel, AISI 316/316L CrNi Stainless Steel
- Bearings: Snbz 12 bronze, carbon graphite, Tungsten carbide, bearing
- Sealing: Soft Seal or Packing Gland, Lip Seal, Mechanical Seal, Special Closed System, Cartridge Type Mechanical Seal

U1 POMPASINA AİT KAPASİTE VE GÜÇ TABLOSU
CAPACITY AND POWER TABLE



KAPASİTE(m ³ /h) CAPACITY (Q)	DEVİR (d/d) SPEED (rpm)	ÇIKIŞ BASINCI / PRESSURE					VİSKOZİTE VISCOSITY
		3 Bar	6 Bar	9 Bar	12 Bar	14 Bar	
0,12	60	0,12 kW	0,18 kW	0,18 kW	0,25 kW	0,25 kW	16500 cst
0,15	80	0,18 kW	0,18 kW	0,25 kW	0,25 kW	0,25 kW	16500 cst
0,2	100	0,18 kW	0,25 kW	0,37 kW	0,37 kW	0,37 kW	16500 cst
0,15	80	0,12 kW	0,18 kW	0,18 kW	0,25 kW	0,25 kW	5500 cst
0,2	100	0,25 kW	0,25 kW	0,25 kW	0,37 kW	0,37 kW	5500 cst
0,6	300	0,55 kW	0,75 kW	0,75 kW	0,75 kW	1,1 kW	5500 cst
1	500	0,75 kW	1,1 kW	1,1 kW	1,1 kW	1,5 kW	1650 cst
1,5	750	1,1 kW	1,5 kW	1,5 kW	1,5 kW	2,2 kW	1650 cst
2	1000	1,5 kW	2,2 kW	2,2 kW	2,2 kW	3 kW	1650 cst
1	500	0,55 kW	0,75 kW	1,1 kW	1,1 kW	1,1 kW	550 cst
1,5	750	0,75 kW	1,1 kW	1,5 kW	1,5 kW	1,5 kW	550 cst
2	1000	1,1 kW	1,5 kW	2,2 kW	2,2 kW	2,2 kW	550 cst
1,5	750	0,55 kW	0,75 kW	1,1 kW	1,5 kW	1,5 kW	165 cst
2	1000	0,75 kW	1,1 kW	1,5 kW	2,2 kW	2,2 kW	165 cst
3	1500	1,1 kW	1,5 kW	2,2 kW	3 kW	3 kW	165 cst
1,5	750	0,55 kW	0,75 kW	1,1 kW	1,5 kW	1,5 kW	22 cst
2	1000	0,75 kW	1,1 kW	1,5 kW	2,2 kW	2,2 kW	22 cst
3	1500	1,1 kW	1,5 kW	2,2 kW	3 kW	3 kW	22 cst

Tabloda bulunan veriler standart viskozitelere göre hazırlanmıştır. Tabloda bulunmayan viskozite değerleriniz için lütfen firma ile iletişime geçiniz.

The data in the table are prepared according to standard viscosities. Please contact the company for viscosity values not included in the table.



POMPA BOYUT ÖLÇÜLERİ / PUMP DIMENSIONS

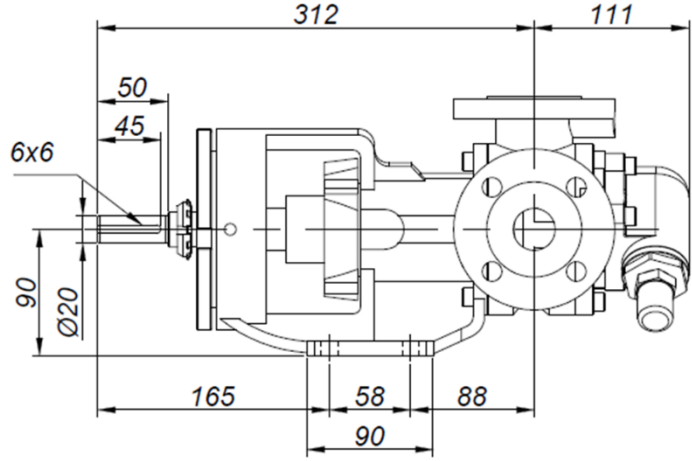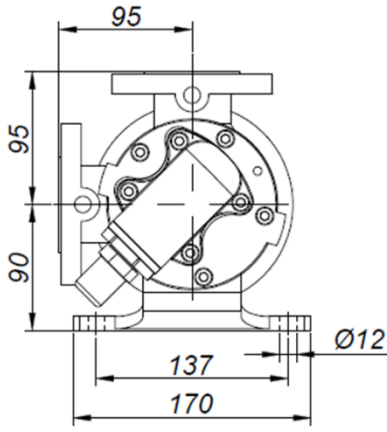

Paslanmaz ve exproof durumunda ölçülerin değişim hakkı firmamızda saklıdır. Bilgi için lütfen firma ile iletişime geçiniz.


When it is stainless and exproof, our company reserves the right to change the measurement. For more information, please contact the company.

YEDEK PARÇA LİSTESİ / SPARE PARTS LIST


- **YUMUŞAK SALMASTRALI**
SEALED WITH SOFT SEAL




- **MEKANİK SALMASTRALI**
SEALED WITH MECHANICAL SEAL

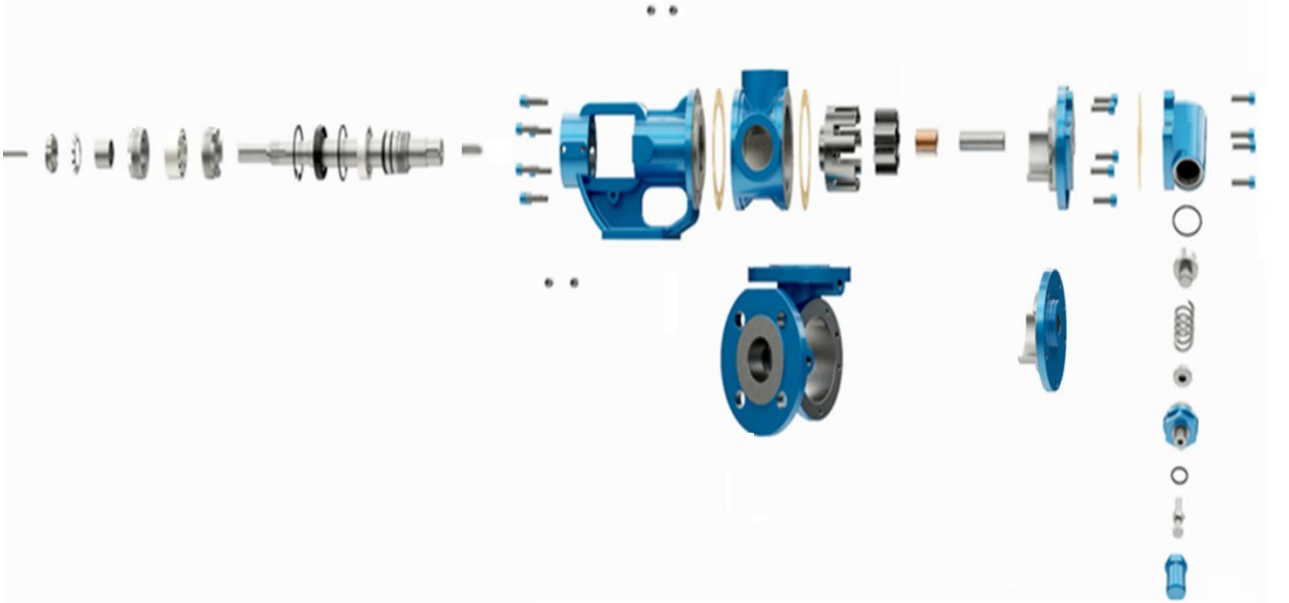

- **KEÇELİ, CEKETLİ VE KÖR KAPAKLI**
SEALED WITH LIP SEAL, JACKETED AND WITH BLIND COVER

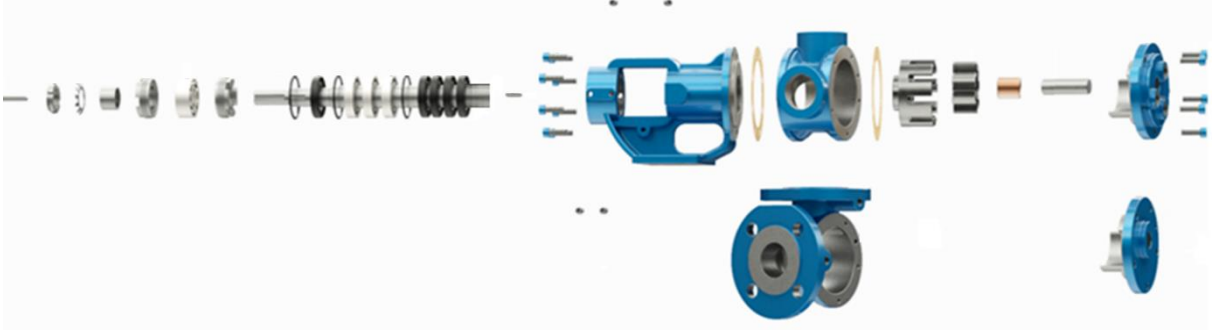

- **KEÇELİ, ÇİFT CİDARLI**
DOUBLE JACKETED AND SEALED WITH LIP SEAL

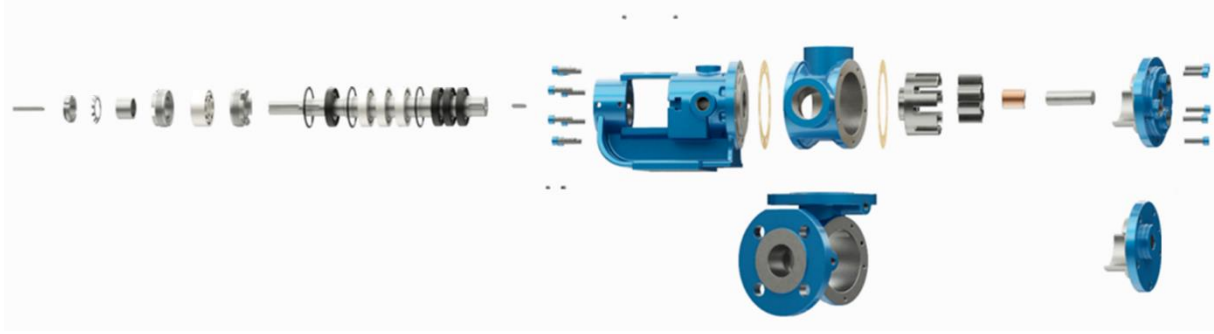

- **KARTUŞ MEKANİK SALMASTRALI**
SEALED WITH CARTRIDGE MECHANICAL SEAL

