

POMPA DEĞERLERİ /
PUMP PROPERTIES

Q	:175 m ³ /h
Hm	:1 ~ 15 Bar
T	:0 ~ 350 °C
n	:1 ~ 500 d/d (rpm)
Visc.	:10 ~ 55.000 cst



KULLANIM ALANLARI

- Endüstriyel uygulamalarda
- Melas
- Petrol
- Yakıt
- Yüksek hacim transferlerinde

USE AREAS

- *Industrial applications*
- *Transfer of molasses*
- *Petroleum*
- *Fuel*
- *High volume transfer*

MALZEME SEÇENEKLERİ

- Pompa Gövdesi, Kapaklar, Dişliler : Dökme (pik) demir, çelik döküm, paslanmaz AISI 316 / 316L döküm, sfero döküm
- Yataklar : Snbz 12 bronz, rulman, karbon grafit,
- Sızdırmazlık: Yumuşak salmastra, mekanik salmastra, Özel Kapalı Sistem



MATERIAL OPTIONS

- *Pump Body, covers and gears: Cast iron, steel cast, stainless AISI 316 / 316L cast.*
- *Bearings: Snbz 12 bronze, bearing, carbon graphite,*
- *Sealing: Soft seal, mechanical seal, Special Closed System.*


H1L POMPASINA AİT KAPASİTE VE GÜÇ TABLOSU CAPACITY AND POWER TABLE						
KAPASİTE(m³/h) CAPACITY (Q)	DEVİR (d/d) SPEED (rpm)	ÇIKIŞ BASINCI / PRESSURE				VİSKOZİTE VISCOSITY
		2 Bar	5 Bar	10 Bar	15 Bar	
25	73	11 kW	15 kW	22 kW	45 kW	55000 cst
40	116	15 kW	22 kW	37 kW	75 kW	55000 cst
30	87	11 kW	15 kW	22 kW	45 kW	16500 cst
50	145	15 kW	22 kW	37 kW	75 kW	16500 cst
50	145	15 kW	22 kW	30 kW	55 kW	5500 cst
100	285	18,5 kW	30 kW	55 kW	90 kW	5500 cst
50	145	22 kW	30 kW	55 kW	90 kW	1650 cst
100	285	30 kW	55 kW	90 kW	132 kW	1650 cst
75	215	18,5 kW	30 kW	55 kW	90 kW	550 cst
150	430	30 kW	55 kW	90 kW	132 kW	550 cst
100	285	18,5 kW	30 kW	55 kW	90 kW	165 cst
175	500	30 kW	55 kW	90 kW	132 kW	165 cst

Tabloda bulunan veriler standart viskozitelere göre hazırlanmıştır. Tabloda bulunmayan viskozite değerleriniz için lütfen firma ile iletişime geçiniz.

The data in the table are prepared according to standard viscosities. Please contact the company for viscosity values not included in the table.

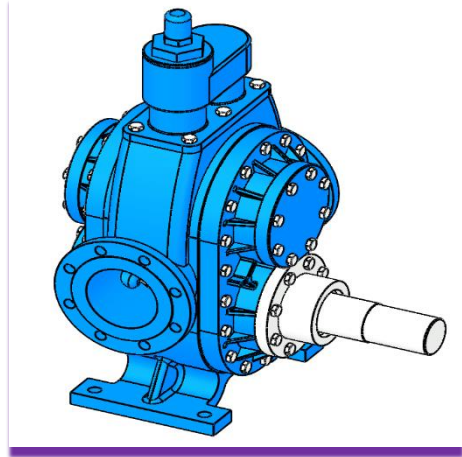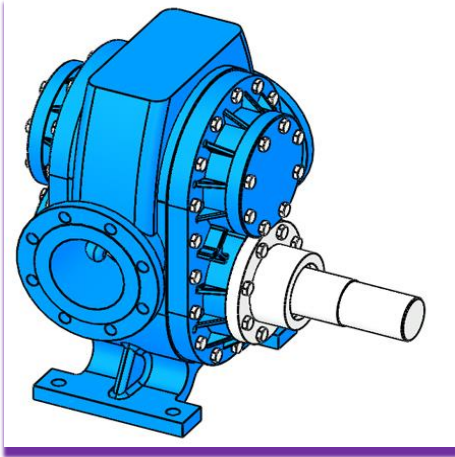

POMPA BOYUT ÖLÇÜLERİ / PUMP DIMENSIONS

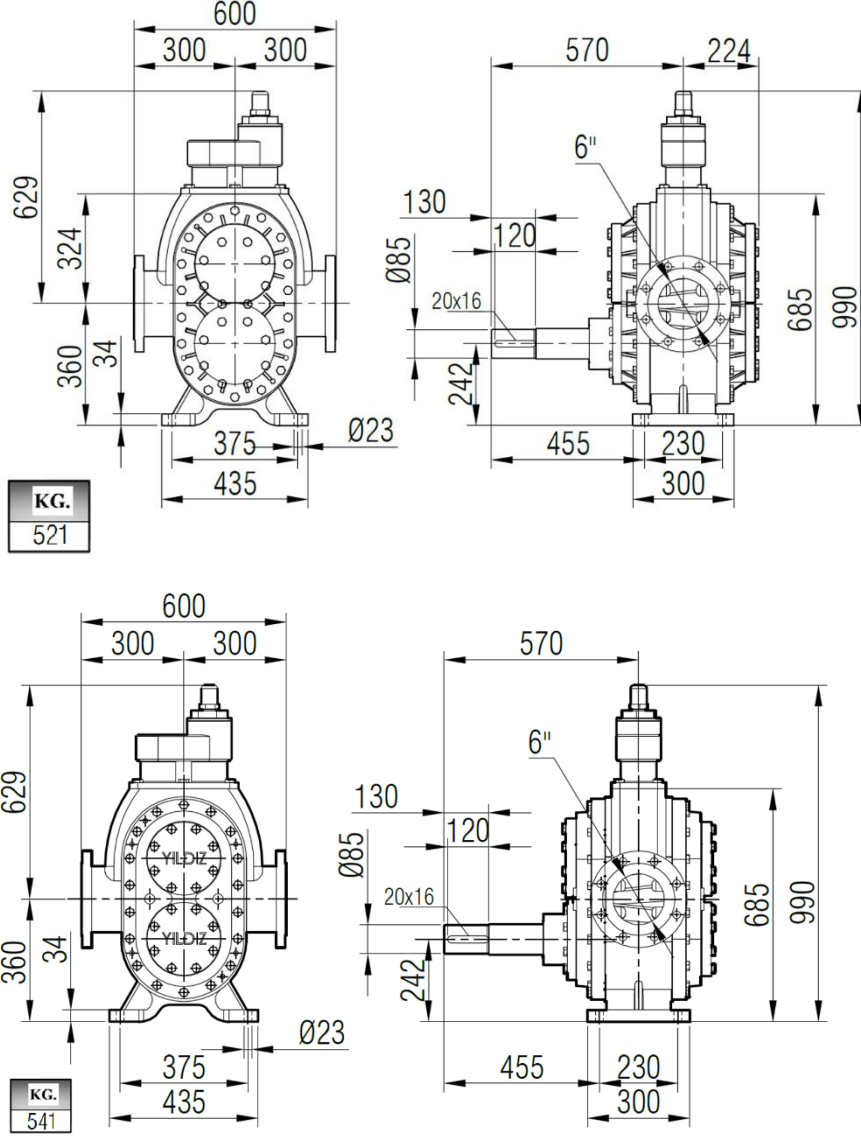


Paslanmaz ve exproof durumunda ölçülerin değişim hakkı firmamızda saklıdır. Bilgi için lütfen firma ile iletişime geçiniz.


When it is stainless and exproof, our company reserves the right to change the measurement. For more information, please contact the company.

YEDEK PARÇA LİSTESİ / SPARE PARTS LIST


- **YUMUŞAK SALMASTRALI**
SEALED WITH SOFT SEAL

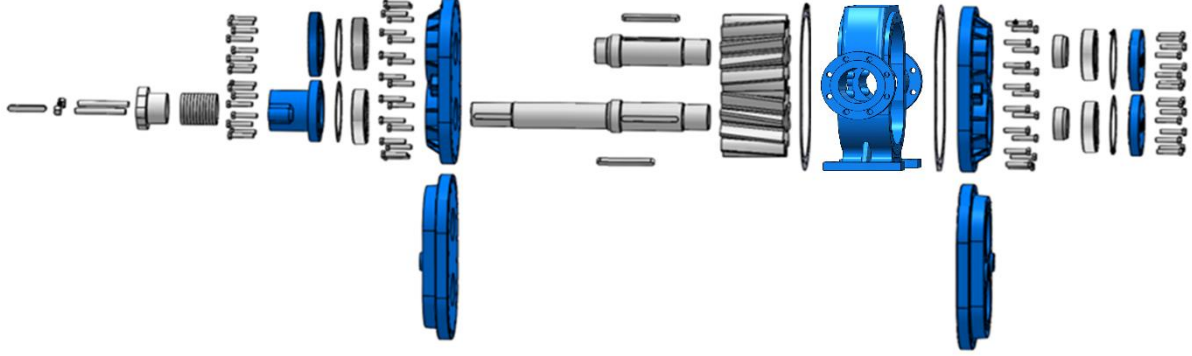

- **MEKANİK SALMASTRALI**
SEALED WITH MECHANICAL SEAL

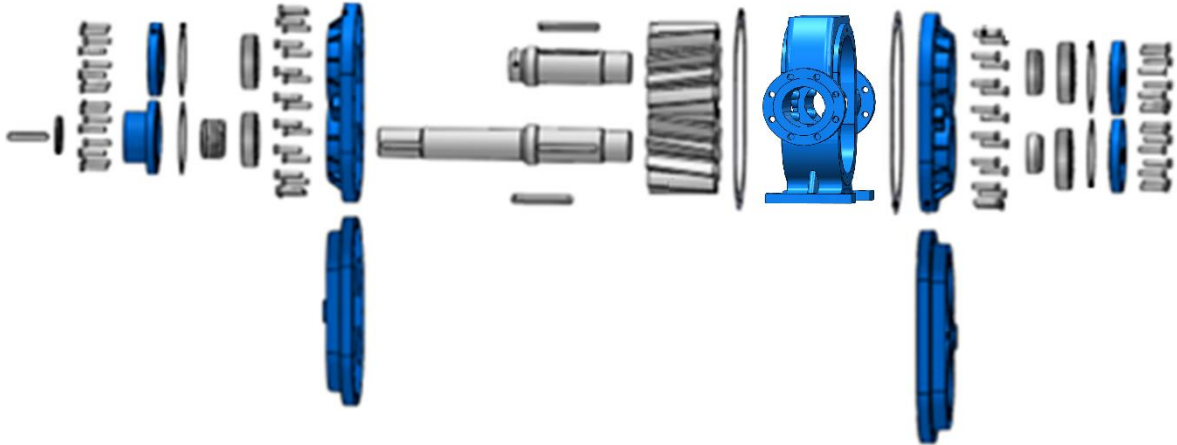

- **YUMUŞAK SALMASTRALI VE BYPASSLI**
SEALED WITH SOFT SEAL AND BYPASSED

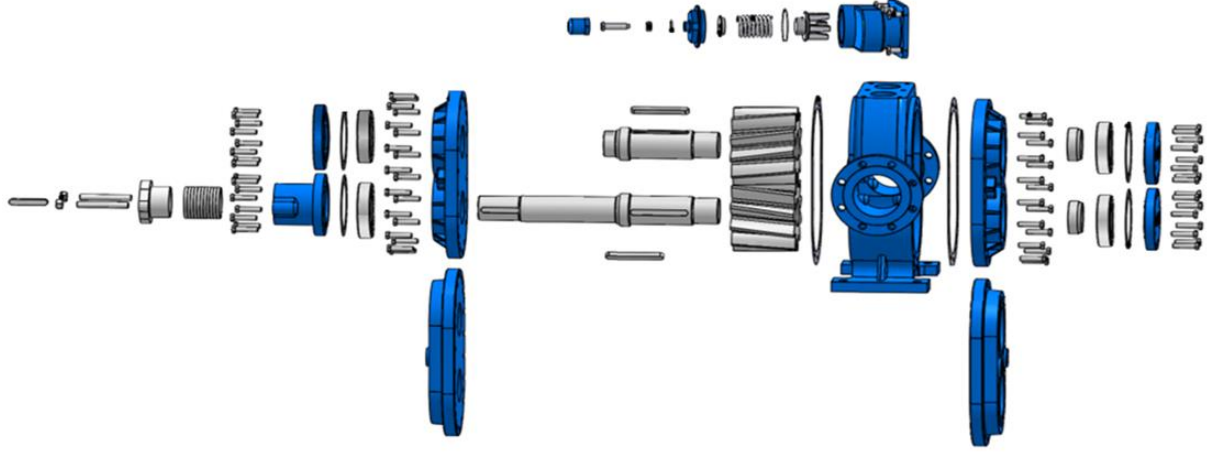

- **MEKANİK SALMASTRALI VE BYPASSLI**
SEALED WITH MECHANICAL SEAL AND BYPASSED

